



PRODUCT MANUAL

etherCON® TOP airtight NE8FDPS-1-TOP & NE8FDIS-1-TOP & NE8FDPU-1-TOP

! Example of etherCON TOP Unmated connection options




1 Connector installation



Example (NE8FDIS-1-TOP) of preassembled Delivery.

✓ IP 65 & IP 67 airtightness  TRUE OUTDOOR PROTECTION

Panel thickness: $\geq 2.0 \text{ mm [0.08"]}$
Panel thickness recommendation is based only on metal panels and may differ for other materials.

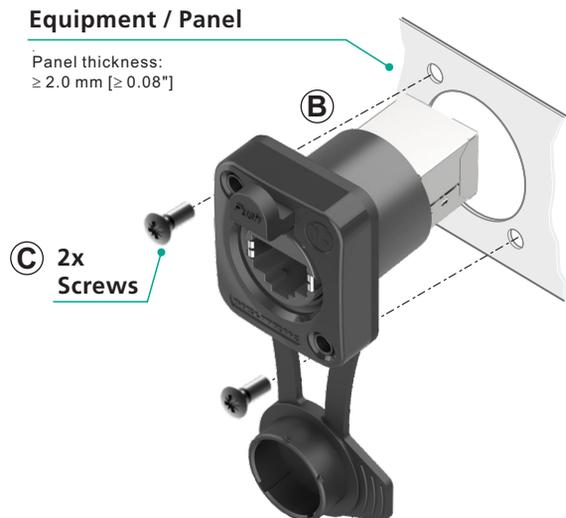

Assembly

- B** Insert the receptacle from the front into the panel.
- C** Position the screw and fasten it.





D ATTENTION:

Tightening torque $M_A = 40 - 60 \text{ Ncm}$


NOTE:

Lubricate sealing lip with silicon from time to time.


2 Additional information

A Panel Cutout (Rear Side)

$R_z \leq 16$

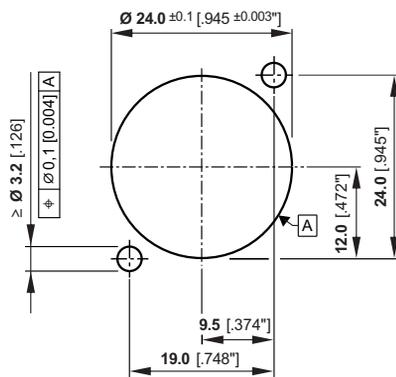

B Recommended screw

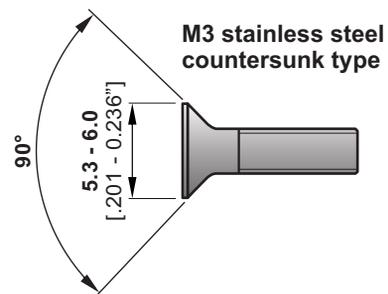

3 Application and Safety Instructions

A Assembly

- When assembling and processing the product, ensure the use of appropriate personal protective equipment.
- Neutrik components must only be assembled with designated and specified components.
- Replacement parts are suitable only when used in combination with the designated components. The product's characteristics are guaranteed only in the intended combination.

B Application

- The product is exclusively intended for installation in electronic equipment or similar devices.
- The product is not intended for use in medical applications.
- The product is not intended for use in potentially explosive or flammable environments.





C Operation

- Before plugging in, check the contact area for dry surfaces.
- Product surfaces may cause burns at elevated ambient temperatures. Ensure the use of appropriate protective equipment.
- Neutrik products should only be combined with products from Neutrik Group brands.

D Cleaning

- Clean only with dry and lint-free materials or compressed air.
- The product must not be cleaned while under load. The product may only be cleaned while it is not connected to any voltage and without the use of cleaning agents.

E Damages

- Handle products with care.
- In case of visible damages, check the suitability of the product for use.

i More Information on the website

<https://www.neutrik.com/en/products/audio/ethercon>



Document No.: BDA 692 V4
Date: 2026-03-18

Neutrik AG | LI-9494 Schaan
www.neutrik.com

Data subject to change without prior notice. © 2026 NEUTRIK®, NEUTRIK® are registered trademark of Neutrik AG. ALL RIGHTS RESERVED.

NEUTRIK
A brand of the Neutrik Group