

## NE8FAV-Y110-DAE


Panel mount RJ45 receptacle, IDC 110 punch down terminals, A-Series cutout with latch lock system, max. panel thickness 3 mm. Mounting screws included.



The etherCON Series is a ruggedized and lockable RJ45 connector system, optimized for pro audio, video and lightning network applications. The chassis connectors are shaped to fit into standardized panels out of the entertainment industry.

The all plastic A-Series offers the most space saving and cost effective design.

Attention! Does not intermate with CAT6 cable connector NE8MC6-MO and NKE6S\* cables.

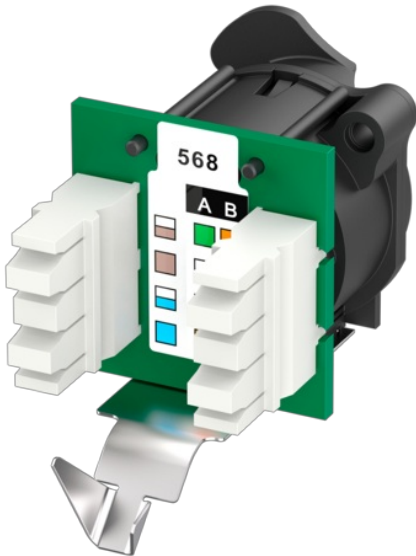

## Features & Benefits

- Accommodates rugged etherCON NE8MX\* or any standard RJ45 plug
- Selectable ground - panel connection
- Approved latch lock system
- Easy and quick mounting using 110 type punch down terminals
- Most space saving and cost effective design
- Compound material of push tab improves ESD protection
- CAT5e / Class D according to TIA/EIA 568C and ISO/IEC 11801
- PoE type 3 class 6 (60W) acc. IEEE 802.3bt

## Technical Information

Product	
Title	NE8FAV-Y110-DAE
Type	Chassis
Connection Type	etherCON
Gender	Female

Electrical	
Contact resistance	< 50 mΩ
Dielectric strength	1 kV DC
Frequency range	1 – 100 MHz
Insulation resistance	> 0.5 GΩ
Rated current per contact	1.5 A
Rated voltage	≤ 57 V
Transmission performance	CAT5e acc. to TIA/EIA 568C channel specifications CLASS D acc. to ISO/IEC 11801 channel specifications
Power over Ethernet	PoE type 3 class 6 (60W) acc. IEEE 802.3bt

<b>Mechanical</b>	
<b>Insertion force</b>	≤ 20 N
<b>Withdrawal force</b>	≤ 20 N
<b>Lifetime</b>	> 1000 mating cycles
<b>Panel thickness</b>	Max. 3 mm (0.12")
<b>Wire size</b>	0.14 - 0.5 mm <sup>2</sup>
<b>Wiresize</b>	26 - 20 AWG
<b>Wiring</b>	IDC 110 punch down terminals
<b>Locking device</b>	Latch lock
<b>Mounting direction</b>	Rear mounting
<b>Chassis shape</b>	A
<b>Mounting</b>	A-Screw

<b>Material</b>	
<b>Contact plating</b>	0.2 µm Au over Ni plating
<b>Contacts</b>	Bronze (CuSn8)
<b>Locking element</b>	HPPA
<b>Shell</b>	PBT D202G30

Environmental	
<b>Flammability</b>	UL 94 V-0
<b>Temperature range</b>	-30 °C to +80 °C
<b>Solderability</b>	Complies with IEC 68-2-20
<b>Standard compliance</b>	ISO/IEC 11801-1 Ed. 1.0 (2017-11) IEC 60603-7-3 Ed.2.0 (2010-04) IEC 60512-99-002 Ed.2.0 (2022-01) IEC 60512-9-3 (2011-06)