NEUTRIK

NBB75DFGB

BNCレセプタクルコネクター Dシリーズ ブラック パネルG接続有り

Dシリーズは、DLXシリーズと共通ピッチのフランジ付きの75ΩBNCコネクターです。

他のレセプタクルコネクターと同じサイズのパネル取り付けピッチにより、DLXシリーズ、RCAなどと共通のパネルにレイアウトすることが可能です。

製品の特長

・中心コンタクト：金メッキ
・HD要件を満たす高精度 75Ωデザイン
・グランド：パネルへ接続
・アクセサリの使用により、カラーコーディングが可能
・DLX取り付けサイズに対応

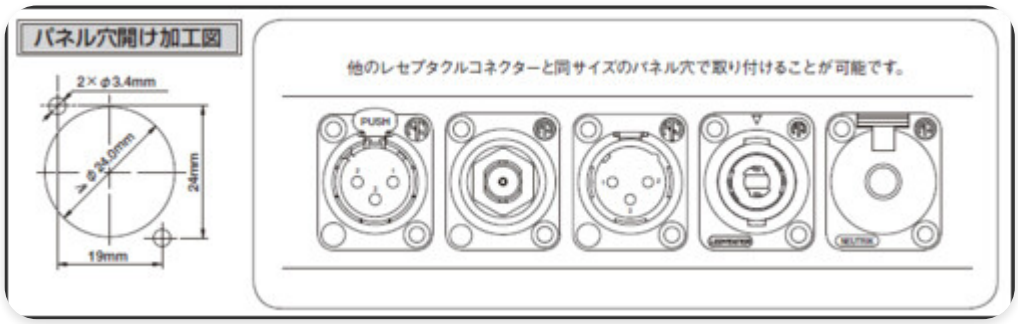

Technical Information

All rights reserved / 01.05.2025

NEUTRIK

Product	
Title	NBB75DFGB
Connection Type	BNC 75 Ω
Gender	female

Electrical	
Signal Type	HD, SDI, Video, AES/EBU, Composit, YUV, RGB, RGBH, RGBHV
Contact resistance	≤ 3 mΩ (inner)
Contact resistance	≤ 2 mΩ (outer)
Dielectric strength	1,5 kVdc
Impedance	75 Ω
Insulation resistance	> 5 GΩ
Rated voltage	<50 V
VSWR	≤1.03/>37 dB up to 1 GHz ≤1.05/>32 dB up to 2 GHz ≤1.08/>28 dB up to 3 Ghz

Mechanical	
Insertion force	< 25 N
Lifetime	> 1000 mating cycles
Wiresize	
Locking device	Bayonett
Mounting direction	Front mounting
Chassis shape	D

All rights reserved / 01.05.2025

NEUTRIK

Material	
Contacts	Brass (CuZn39Pb3), 0.2 µm AuCo (Center contact)
Insert	PTFE
Shell	Polyacetal (POM) (Insulation Sheell)
Shell plating	Optalloy®
D-Shape housing	Zinc diecast (ZnAl4Cu1) gal black chrome plating

Environmental	
Temperature range	-30 °C to +85 °C

All rights reserved / 01.05.2025