



NE8FDV-SE

etherCON (イーサコン) Dシリーズは、弊社製 CAT5シリーズケーブルコネクタ (NE8MC*) に対応したDLXシリーズ取り付けサイズのRJ45レセプタクルコネクタです。

ネットワーク時代の高信頼性データ転送アプリケーションに最適です。XLRタイプコネクタと同様にラッチロック機構を持ち、ヘビーデューティな用途に対応します。

Features & Benefits


RJ45コネクタ イーサコンレセプタクル Dシリーズ 垂直基板取付用

- ・カテゴリ5対応
- ・SE8FDセットモデル
- ・対応モデル (NE8MC-1、NE8MC-B-1) との嵌合時に限り、保護等級IP54を発揮
- ・弊社製CAT5シリーズコネクタ (NE8MC*)、RJ45に準拠したコネクタに対応
- ・DLXシリーズ取り付けサイズ
- ・取り付けネジ付属なし

Features & Benfits

- ✓ In combination with NE8MC-1 waterproof according to IP54
- ✓ Accommodates NE8MC* or any standard RJ45 plug
- ✓ Complies with Class D according to TIA / EIA 568B and ISO / IEC 11801 standard
- ✓ Approved latch lock system
- ✓ Mountable from the front of the panel
- ✓ Ground-panel connection

etherCON NE8FDV-SE

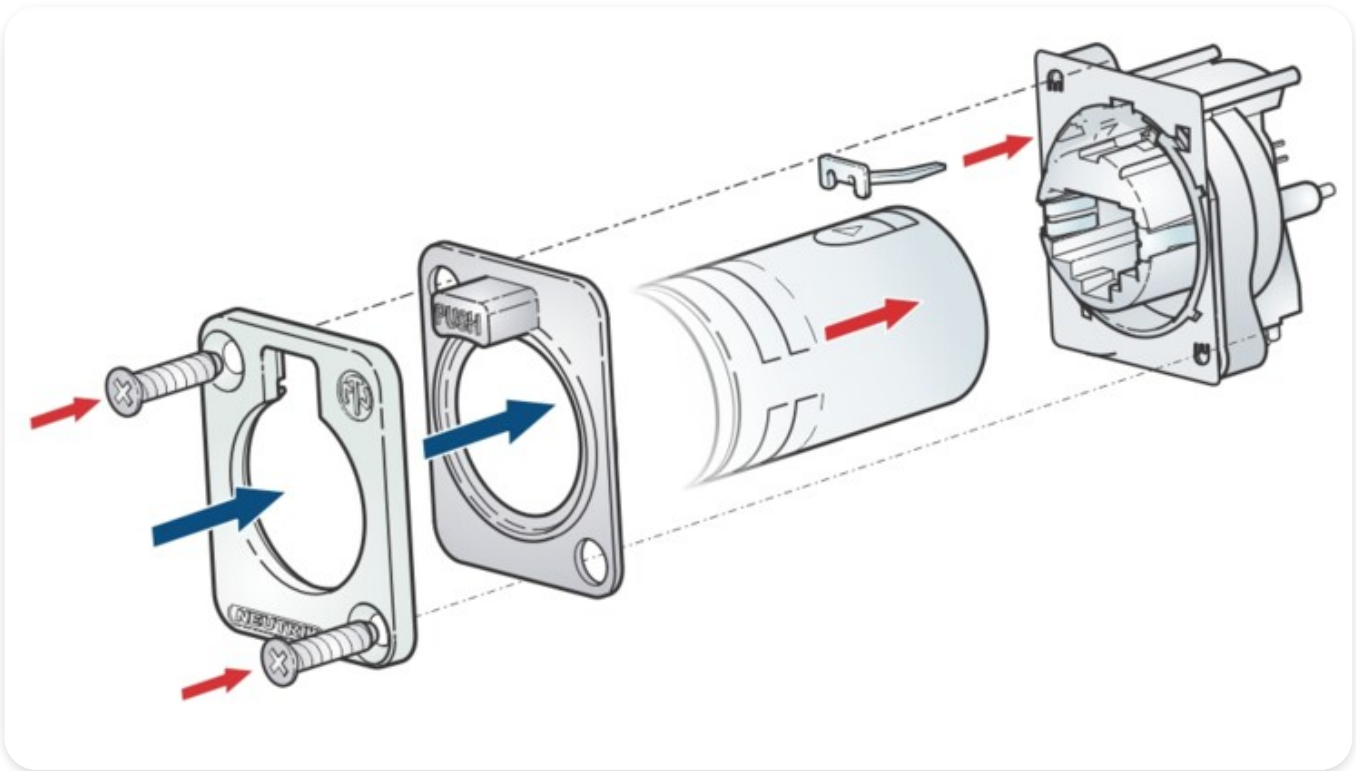

Technical Information

Product	
Title	NE8FDV-SE
Gender	female

Electrical

Contact resistance	< 50 mΩ
Dielectric strength	1 kVdc
Frequencyrange	1 - 100 MHz
Insulation resistance	> 0.5 GΩ
Rated current per contact	1.5 A
Rated voltage	≤ 57 V
Transmission performance	CAT5e acc. to TIA/EIA 568C channel specifications CLASS D acc. to ISO/IEC 11801 channel specifications
Power over Ethernet	PoE type 4 class 8 (100W) acc. IEEE 802.3bt

Mechanical

Insertion force	≤ 20 N
Withdrawal force	≤ 20 N
Lifetime	> 1000 mating cycles
Panel thickness	2 mm - 4 mm , 0.08" - 0.16"
Wiresize	
Wiring	vertical PCB mount
Locking device	Latch lock

Material	
Contact plating	0.2 µm Au over Ni plating
Contacts	Bronze (CuSn8)
Insert	PBTP 15 % GR
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Chromium

Environmental	
Flammability	UL 94 V-0
Solderability	Complies with IEC 68-2-20
Temperature range	-30°C to +80 °C
Standard compliance	ISO/IEC 11801-1 Ed. 1.0 (2017-11) IEC 60603-7-3 Ed.2.0 (2010-04) IEC 60512-99-002 Ed.2.0 (2022-01) IEC 60512-9-3 (2011-06)