




powerCON TRUE1 - Power cord open-end

Ready-made overmolded power cord in protection class IP65. The cable utilizes standard duty cord with 3 conductors with cross section 1.5 mm² or AWG 12.

The cables are equipped with overmolded Neutrik powerCON TRUE1 NAC3FX-W or NAC3MX-W. The other end is open for termination of local connectors. Overmolded local connectors on request. The cables are available in different lengths.

Cable Part Number Breakdown

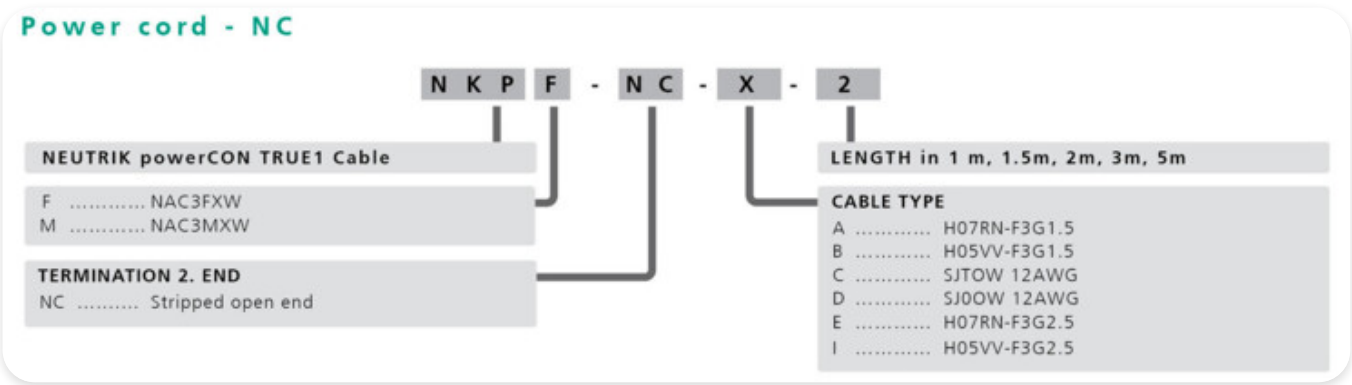

powerCON TRUE1

The powerCON TRUE1 is a locking waterproof 16 A (USA: 20 A) true mains connector. It replaces appliance couplers wherever a very rugged solution in combination with a locking device is needed in order to guarantee a safe power connection.

The powerCON TRUE1 is a connector with breaking capacity (CBC), i.e. it can be connected or disconnected under load or live.


powerCON TRUE1 Power Cable male



Mating scenario powerCON TRUE 1 chassis connector NAC3FPX-W



Mating scenario powerCON TRUE 1 chassis connector NAC3MPX-W

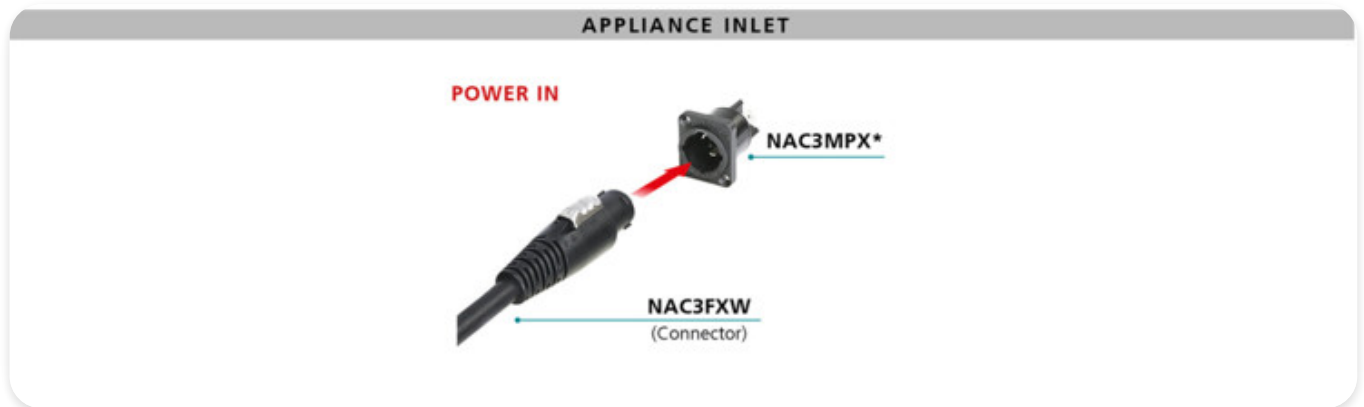

Mating scenario powerCON TRUE 1 chassis connector NAC3PX



powerCON TRUE1 Power Cord

